

SUPERVISION® 2.0

BENEFITS

▶ **Full control. Even remotely.**

With full insight into the machines' performance, you can adjust modes, settings and target values from anywhere – and control several drying processes at the same time.

▶ **Reliable and stable operation. Minimal interruptions.**

Status information and instant notifications make it easy to detect deviations and operational issues early, minimising downtime.

▶ **Improved climate control. Higher efficiency.**

Monitoring provides a more stable and reliable drying process with lower energy consumption and more consistent results.

▶ **Transparent documentation. Easy traceability.**

Automatic logs provide a verifiable history of climate data and energy consumption, simplifying quality assurance and documentation.

▶ **Data-driven control. Optimised drying process.**

Continuous analysis of temperature, relative humidity, energy consumption and machine status enables the drying process to be optimised with high precision.


▶ **Proactive identification. Prevent inefficiency.**

Analysis of measurement values and operational data makes it possible to detect deviations early and prevent damage, delays and increased costs.



HOW IT WORKS

The entire machine fleet can be optimised and synchronised – regardless of technology level. SuperVision® 2.0 integrates both digital and analogue equipment into one unified control system, enabling full remote management of the entire drying process. The 5G connection and MESH technology ensure stable coverage and high performance, even in challenging environments. The wireless radio communication allows the system to automatically enhance range and reliability between the units.

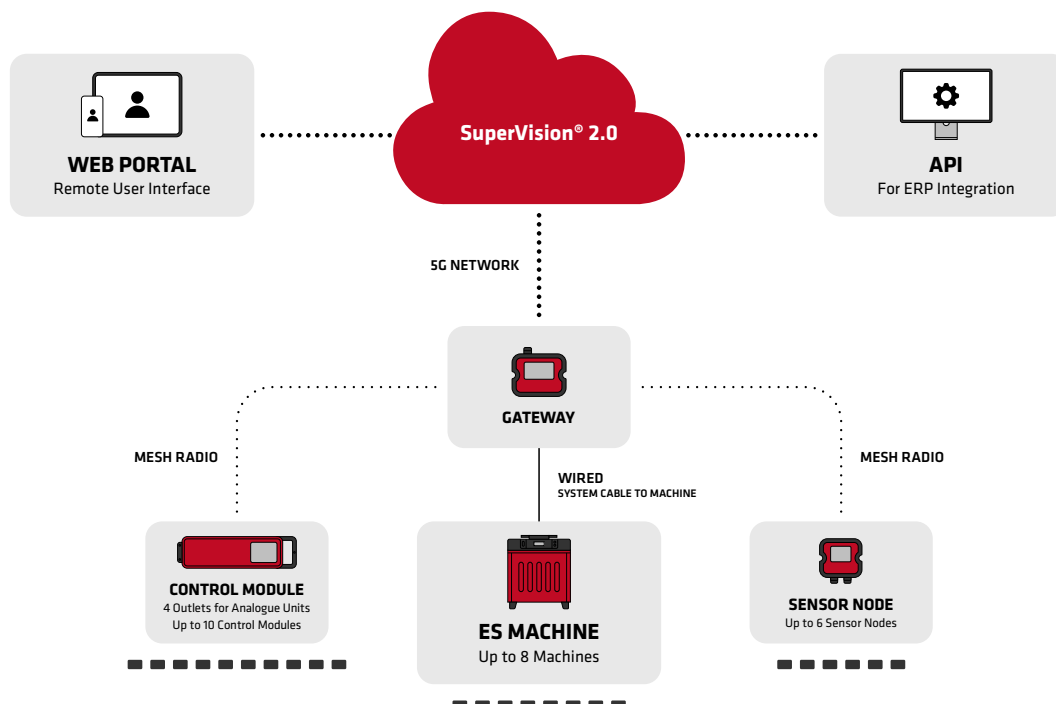

SUPERVISION® 2.0 PLUS KIT

The SuperVision® 2.0 Plus kit includes the SuperVision® 2.0 Control Module, which enables the connection of both digital and analogue machines as well as heating mats for remote control and monitoring. You also receive equipment for measuring in materials such as wood, as well as sensors for RH measurement with dynamic airflow control.



CONTENT	Plus kit
1 SuperVision® 2.0 Gateway	1
2 SuperVision® 2.0 Sensor nodes incl. battery	2
3 SuperVision® 2.0 RHT Sensor	4
4 System cabel ES 0,5 m	1
5 WME Heavy Duty Moisture probe	1
6 SuperVision® 2.0 Power adapter	1
7 SuperVision® 2.0 Control Module	1
8 SuperVision® 2.0 Transport case	1
Number of items	12
Article number	1006813

OPTIONAL ACCESSORIES	Article number
Rubber seal for measuring tube, 10 pcs	1006435
Long insulated probes - 14" (350 mm)	9911152
SuperVision® 2.0 Power adapter	1003720
SuperVision® 2.0 RHT Sensor, 10 pcs	1006433
SuperVision® 2.0 HP RHT Sensor, 5 pcs	1006436

SUPERVISION® 2.0 CONTROL MODULE

With the control module, you can easily connect and remotely operate up to four analogue machines at the same time. Each socket is controlled individually, meaning that each machine can be managed completely independently of the others - giving you full flexibility regardless of your machine fleet.



Scan the QR code and find out how you can take control of the entire drying process.

Corroventa
MAKING DRYING SMARTER™

CORROVENTA LTD
Unit 47, Melford Court, Hardwick Grange,
Warrington England WA1 4RZ • Tel +44(0) 161-2449523
www.corroventa.com