

SUPERVISION® 2.0

BENEFITS

▶ **Full control. Even remotely.**

With full insight into the machines' performance, you can adjust modes, settings and target values from anywhere – and control several drying processes at the same time.

▶ **Reliable and stable operation. Minimal interruptions.**

Status information and instant notifications make it easy to detect deviations and operational issues early, minimising downtime.

▶ **Improved climate control. Higher efficiency.**

Monitoring provides a more stable and reliable drying process with lower energy consumption and more consistent results.

▶ **Transparent documentation. Easy traceability.**

Automatic logs provide a verifiable history of climate data and energy consumption, simplifying quality assurance and documentation.

▶ **Data-driven control. Optimised drying process.**

Continuous analysis of temperature, relative humidity, energy consumption and machine status enables the drying process to be optimised with high precision.


▶ **Proactive identification. Prevent inefficiency.**

Analysis of measurement values and operational data makes it possible to detect deviations early and prevent damage, delays and increased costs.



HOW IT WORKS

SuperVision® 2.0 Start kit optimises and synchronises your ES machines in a unified control system with full remote management of the drying process. The 5G connection and MESH technology provide stable coverage and high performance, even in challenging environments. The wireless radio communication allows the system to automatically enhance range and reliability between the units.

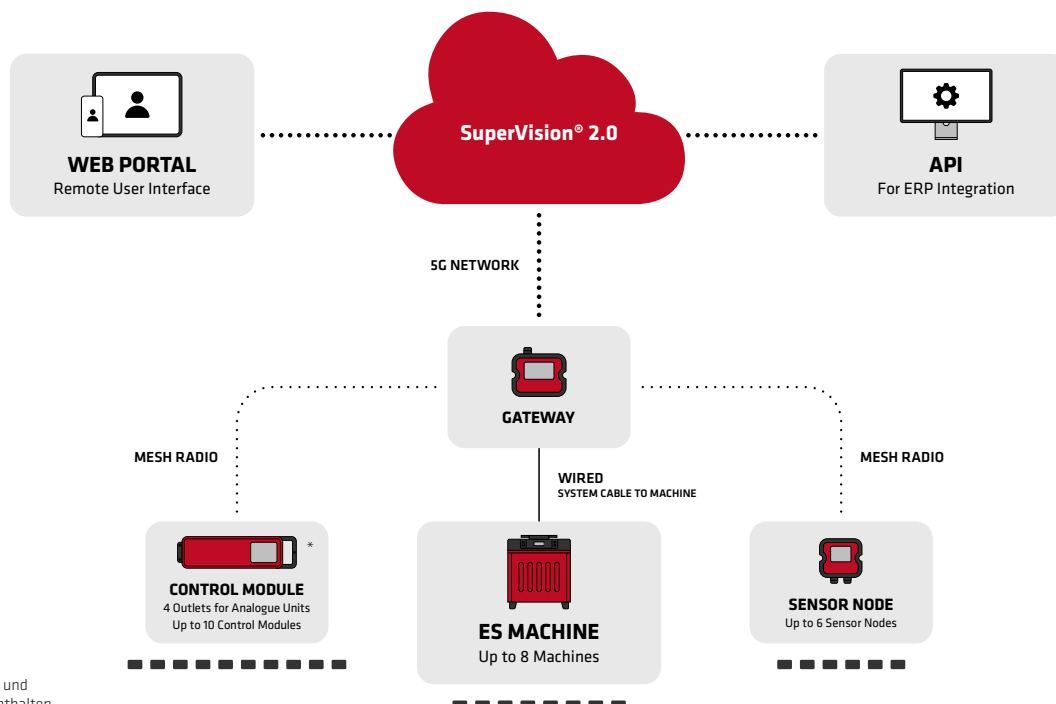

* Nur in den Plus- und Precision-Kits enthalten

SUPERVISION® 2.0 START KIT

The SuperVision® 2.0 Start kit is designed for remote control and monitoring of Corroventa's machines in the ES family. Each SuperVision® 2.0 Gateway can manage up to eight ES machines that can communicate and work together to deliver an energy-efficient drying process with high precision.



CONTENT	Start kit
1 SuperVision® 2.0 Gateway	1
2 SuperVision® 2.0 Sensor nodes incl. battery	1
3 SuperVision® 2.0 RHT Sensor	1
4 SuperVision® 2.0 HP RHT Sensor	1
5 Measuring tube HP RHT Sensor, 5-pack	1
6 Sealing compound for measuring tube	1
7 System cable ES 0,5 m	1
8 SuperVision® 2.0 Transport case	1
Number of items	8
Article number	1006360

OPTIONAL ACCESSORIES	Article number
Rubber seal for measuring tube, 10 pcs	1006435
Long insulated probes - 14" (350 mm)	9911152
WME Heavy Duty Moisture probe	9911150
SuperVision® 2.0 Power adapter	1003720

SUPERVISION® 2.0 HP RHT SENSOR

The HP RHT sensor enables moisture measurement even in dense materials, such as concrete, over extended periods with high accuracy.



Scan the QR code and find out how you can take control of the entire drying process.

Corroventa
MAKING DRYING SMARTER™

CORROVENTA LTD
Unit 47, Melford Court, Hardwick Grange,
Warrington England WA1 4RZ • Tel +44(0) 161-2449523
www.corroventa.com